




# "WET LOOK" 2000 LACQUER

EXPOSED AGGREGATE  
 STAMPED CONCRETE  
 POROUS BRICK  
 NATURAL POROUS STONE  
 SALTILLO TILE  
 STUCCO  
 CONCRETE  
 ADOQUIN/CANTERA  
 INTERLOCKING PAVERS  
 FLAGSTONE

## PRODUCT DESCRIPTION

A revolutionary Low-VOC crystal clear acrylic coating designed to protect and beautify concrete, masonry and tile surfaces. This super-tough film gives a rich "Wet Look", resists chemicals, abrasion and stains. It is suitable for interior and exterior use.


"WET LOOK" 2000 utilizes the same resin system as Glaze 'N Seal's original Lacquer, thereby providing the same dependable performance. It contains unique low VOC solvents creating an environmentally-responsible formula.

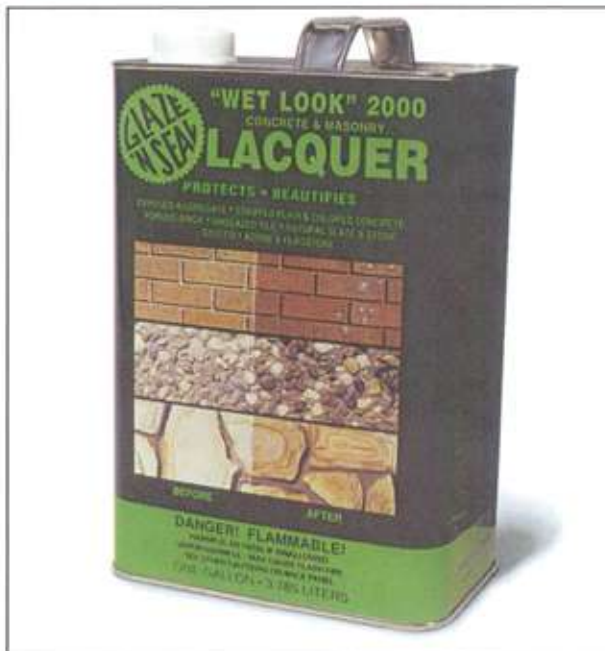

## USES

Protects garage floors and driveways from oil stains. Eliminates concrete dusting and freeze-thaw problems. Protects patio and barbecue areas from food and grease stains. Saturation with Glaze 'N Seal will actually harden old and deteriorating mortar and plaster for added life. Independent laboratory tests rate Glaze 'N Seal superior for abrasion resistance, sunlight resistance and stain resistance qualities.

### Rich "Wet Look"

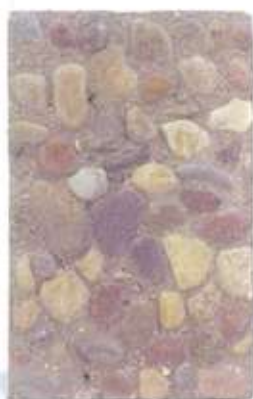

Unsealed



Sealed

## SPECIAL NOTES

"WET LOOK" 2000 is fully compatible with Glaze 'N Seal original Lacquer and may be used over it for recoating purposes.

"WET LOOK" 2000 fully complies with strict South Coast Air Quality Management District requirements.

"WET LOOK" 2000 has improved coverage up to 15-20% greater than other formulas. Adjust application accordingly with thin, even coats.

## FEATURES

Non-Yellowing • Use Indoor or Outdoors  
Fast Drying and Long Lasting • Apply With Brush or Sprayer  
Prevents Staining • High Solids  
Strong Resistance to Efflorescence  
Low VOC's

## PREPARATIONS

All surfaces must be free of efflorescence, dirt, oil, wax, grease and defective paint or sealers. If acid is used, all residue must be removed prior to application. Use Glaze 'N Seal Neutralizing Rinse to neutralize surface. Allow to dry thoroughly before applying "WET LOOK" 2000.

## APPLICATION

Apply 2-4 light, even coats (depending on porosity of surface) with a natural brush or low pressure/airless sprayer (with metal or teflon tip).

Do Not allow product to puddle.

Allow 1-3 hours between coats, 24 hours before light use. Apply in temperatures between 55° F and 80° F- avoid using in direct sunlight. Use only in well ventilated areas.

**Helpful Hint:** Use lacquer thinner or acetone for easy clean up.

**IMPORTANT:** Product contains petroleum distillates. Read product label carefully or consult with dealer for more detailed preparation, application and caution information.

## SPECIFICATIONS

COLOR	CLEAR
ODOR	SWEET
GLASS TRANSITION RATE	+50°
DENSITY	7.7 lbs
TUKON HARDNESS	12-13
COVERAGE	125 to 500 sq.ft./gal (1st Coat) 50% greater on 2nd coat
DRYING TIME (at 68°F, 50% RH)	
dry to touch	1/2 - 2 hours
recoat	2 - 3 hours
open to light traffic	24 hours
open to heavy traffic	2 - 3 days
LEVELING	Excellent
DRY TIME	1 Hour
FLASH POINT	37°F
APPLICATION TEMP	50°F to 80°F
CHEMICAL RESISTANCE	Excellent

## MAINTENANCE

To protect the sealer and extend life (indoors), use Glaze 'N Seal Floor Polish (Regular or Matte Finish) as a traffic coat. Sweep and damp mop floor frequently.

## SPECIAL NOTES

Always test a small area of surface to verify protection and appearance. NOT RECOMMENDED for glazed tile, marble, dense brick or dense slate. If in doubt test surface. **Do not** use where hydrostatic pressure is possible.

Product	Pack Size	Prod. No.	lbs./cs.	UPC
"WET LOOK" 2000 LACQUER	6/gallon	103	51	10734 33340
	5 gallon pail	104	45	10734 33342
	55 gallon drum	105	490	10734 33343



Quality Products for Concrete, Tile and Masonry